




E-NETTR T1/CEPT/ISDN-PRI Transformer

P/N: H4002B


- 0 Lead-Free & Designed to meet RoHS requirement
- 0 Designed to meet IR 255°C peak Requirement.
- 0 Operating temperature range: -40°C to +85°C
- 0 Storage temperature range: -40°C to +85°C



Electrical Specifications@25° C


Part Number	Turn Ratio (±1.5%)	OCL(mH Min) @ 100KHz/0.1V with 0mA DC Bias	L.L (uH Max)	C _{w/w} (pF Max)	DCR (Ω Max)	Hi-Pot (Vrms MIN)
H4002B	1-3 : 40-38=1: 2	1.2	0.6	35	1.1	AC 1500V 1mA

Mechanical

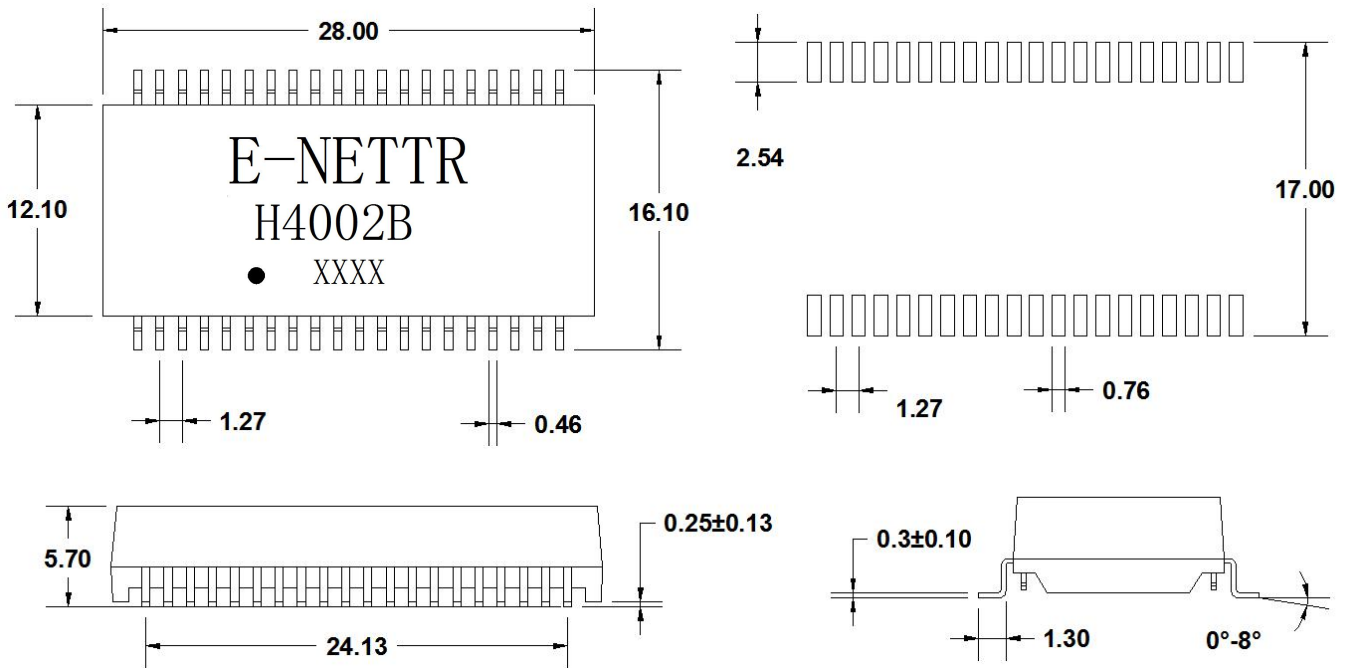

Dimensions: Inches/mm
 Unless otherwise specified tolerances: xx.xo ± 0.25mm
 o.xx ± 0.05mm

Schematic

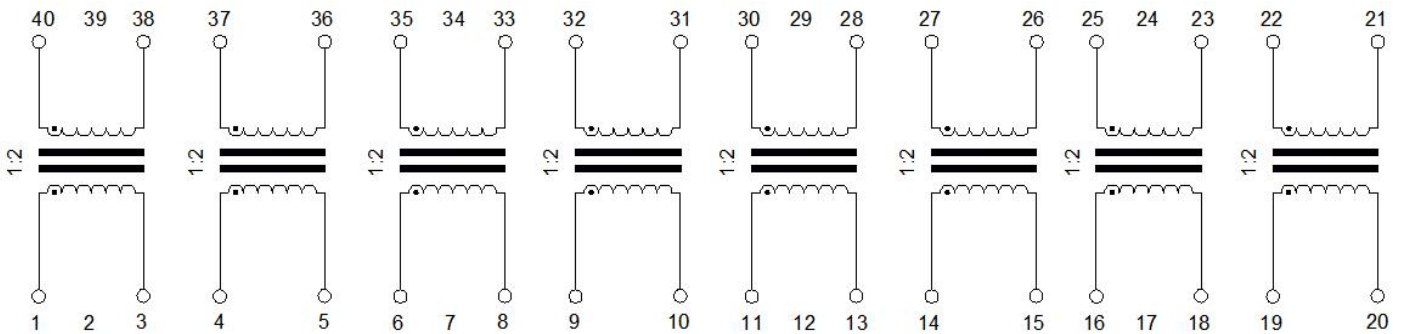

东莞市祥星电子有限公司

地址: 东莞市石碣镇横滘科技中路第三工业区

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com

xxing.guang@163.com