




TSZ-01 Transverse/Longitudinal Transducer Test Fixture

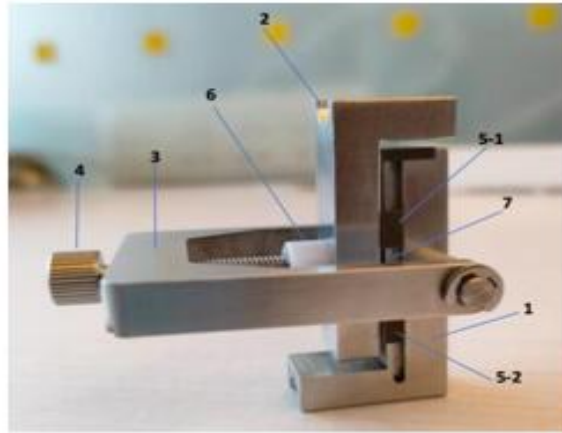

- 1-下压块
- 2-上压块
- 3-固定框架
- 4-旋转固定螺柱
- 5- (1,2) 滑动定位卡子
- 6-绝缘头
- 7-被测样品

The main technical indicators of square samples of longitudinal and transverse fixtures:

Specimen size range: $h > 11\text{mm}$, $T < 40\text{mm}$, $R < 20\text{mm}$;


Measurement accuracy: 1% of soil

Test electrode: Stainless steel transverse end silver-plated

Base electrode: PTFE insulating material



ZST-02 Tangential Measurement Fixture

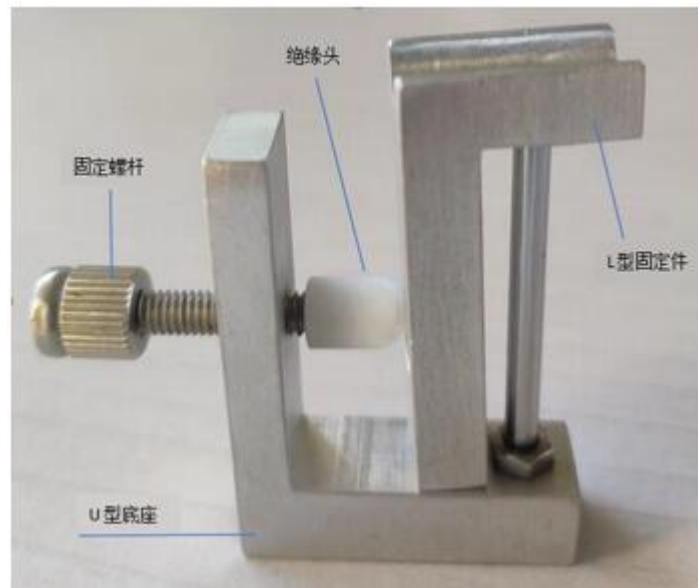

The main technical parameters of tangential fixture:

1. Scope of application:

Thickness > 1mm, Length: 15mm, Width: 5mm

D15: Measurement uncertainty error range: 10% soil 1 to 3 pCN.

Main technical parameters of round pipe fixture sample:

1. Pipe diameter: 3-5mm, thickness: 1-2mm

D15: Measurement uncertainty error range: 10% soil 1 to 3 pCN.

Material: Alloy material