




E-NETTR 10/100/1000 BASE-T Transformer Module

P/N: H24410

- * Designed to meet IEEE802.3ab requirement
- * Lead-Free & Designed to meet RoHS requirement
- * Designed to meet IR 255°C peak Requirement.
- * Primary inductance 350μH min. with 8mA DC Bias
- * Operating temperature range:-40°C to +85°C




Electrical Specifications@25° C

Part Number	Turn Ratio (±3%)	OCL(uH Min) @100KHz/0.1V with 8mA DC Bias	L.L (uH Max)	C _{w/w} (pF Max)	DCR (Ω Max)	Hi-Pot (Vrms MIN)
H24410	1CT:1CT	350	0.5	28	1.1	AC 5000V / 1mA

Continue


Part Number	Insertion Loss 0.3~100MHZ (dB Max)	Return Loss (dB Min)					Cross Talk (dB Min)			DCMR (dB Min)		
		0.3-30MH	40MHz	50MHz	60-80MHz	100MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz
H24410	-1.1	-18	-14.4	-13.1	-12	-10	-45	-40	-35	-43	-37	-33

Mechanical

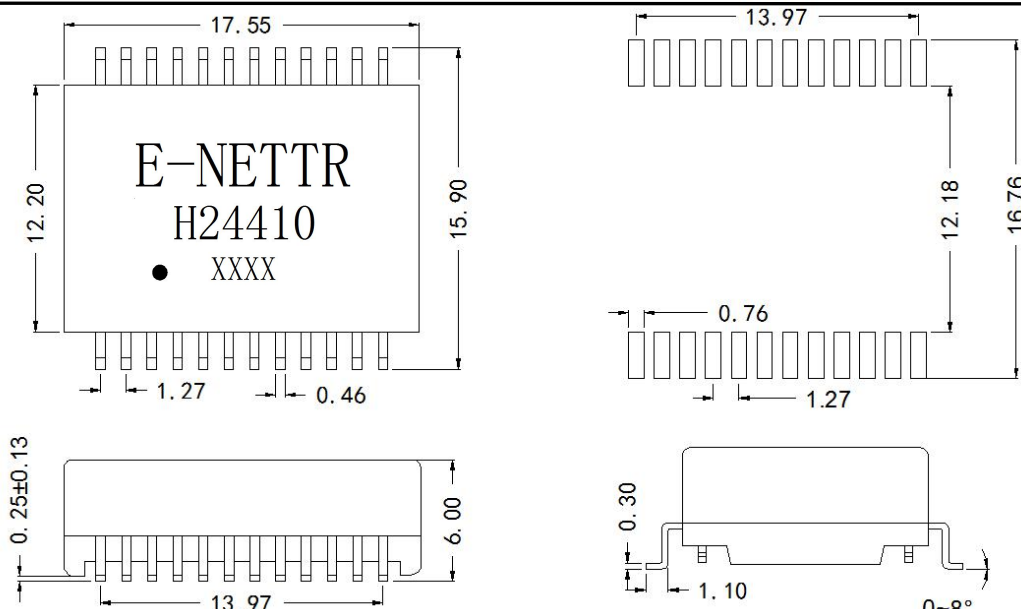

Unless otherwise specified tolerances: xx.xo ± 0.25mm
o.xx ± 0.05mm

Schematic

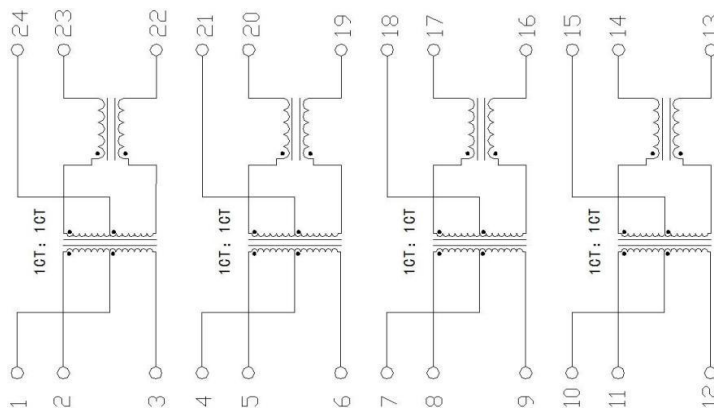

东莞市祥星电子有限公司

地址：东莞市石碣镇横滘科技中路第三工业区

TEL:0769-86384669

FAX:0769-81813600

Http://www.e-nettr.com

xxing.guang@163.com